

**Accessories**  
**CB 98/2.5 BLACK****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

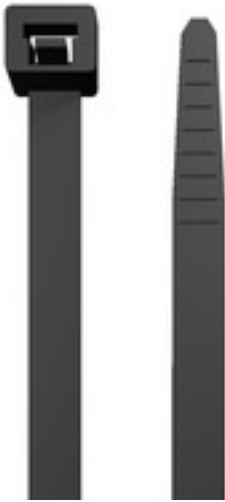

CB cable ties for the fastening of cables and markers.

- They are particularly suitable for fastening CLI M, SFX, WKM and WKS cable markers
- IEC 62275: 2006-conformant
- Fracture-resistant polyamide PA 6.6 with flammability rating V2 to UL-94

**General ordering data**

|            |                                                             |
|------------|-------------------------------------------------------------|
| Type       | CB 98/2.5 BLACK                                             |
| Order No.  | <a href="#">1697890000</a>                                  |
| Version    | Cable ties, Height x width: 98 x 2.5 mm, Polyamide 66, 80 N |
| GTIN (EAN) | 4008190882969                                               |
| Qty.       | 100 pc(s).                                                  |

## Accessories

### CB 98/2.5 BLACK

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Dimensions and weights

|            |        |                 |            |
|------------|--------|-----------------|------------|
| Width      | 2.5 mm | Width (inches)  | 0.098 inch |
| Height     | 98 mm  | Height (inches) | 3.858 inch |
| Depth      | 1.1 mm | Depth (inches)  | 0.043 inch |
| Net weight | 0.2 g  |                 |            |

### Installation materials

|                                   |       |                                   |              |
|-----------------------------------|-------|-----------------------------------|--------------|
| Cable diameter, max.              | 21 mm | Material                          | Polyamide 66 |
| Operating temperature range, max. | 85 °C | Operating temperature range, min. | -40 °C       |
| Tensile strength                  | 80 N  | UL 94 flammability rating         | V-2          |

### Classifications

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 3.0   | EC000046    | ETIM 4.0   | EC000046    |
| ETIM 5.0   | EC000046    | ETIM 6.0   | EC000046    |
| UNSPSC     | 30-21-18-01 | eClass 5.1 | 27-14-07-02 |
| eClass 6.2 | 27-14-07-02 | eClass 7.1 | 27-14-07-02 |
| eClass 8.1 | 27-14-07-02 | eClass 9.0 | 27-14-07-02 |
| eClass 9.1 | 27-14-07-02 |            |             |

### Approvals

Approvals



ROHS Conform

### Downloads

|                                             |                                        |
|---------------------------------------------|----------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">DE PI830000 160627 001</a> |
| Engineering Data                            | <a href="#">EPLAN, WSCAD</a>           |

**Data sheet****Accessories  
CB 98/2.5 BLACK**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**